



# **OPTI-LUX™ 365** SERIES

# LED UV-A Inspection Lamps

**OLX-365** SERIES

Spot fluorescent indications in the smallest of spaces.



Rechargeable Battery



Bright & Uniform Beams



Instant-On Operation



Small Space Inspection





4 MODELS:

High-Intensity & Standard-Intensity both with and/or without UV-A pass filters

MODEL	HIGH INTENSITY	STANDARD INTENSITY	CLEAR FILTER	INTERNAL Back Light Filter	NOMINAL STEADY-STATE UV-A (365 nm) INTENSITY at 15 in (38 cm) <b>①</b>	VISIBLE LIGHT MEASUREMENT	UV-A COVERAGE AREA at 15 in (38 cm) at minimum 1,000 µW/cm²
0LX-365	•				10,000 μW/cm²	0.8 foot-candles (8.6 lux)	2.25 in (5.7 cm)
OLX-365B	•			•	10,000 μW/cm²	0.4 foot-candles (4.3 lux)	2 in (5 cm)
OLX-365FL		•	•		4,500 μW/cm <sup>2</sup>	0.3 foot-candles (3.2 lux)	3.25 in (8.3 cm)
OLX-365BFL		•		•	4,500 μW/cm <sup>2</sup>	0.2 foot-candles (2.1 lux)	3 in (7.6 cm)

Light Source:	UV-A LED
Lamp Style:	Cordless flashlight
Lamp Head Diameter:	1.25 in (3.2 cm)
Length:	5.9 in (15 cm)
Power Requirements:	One 3.7V 2200mA/Hr lithium-ion battery (rechargeable)
Weight (w/Battery):	4.6 oz (130 g)
Run Time:	4 hours (continuous)
Charge Time:	4 hours (one or two batteries)
Charging Cradle:	Two-battery capability with AC and DC cord sets*

 $\Phi$  UV-A intensity reading taken with the Spectroline® AccuMAXTM Series meter, and is factory set to the value shown.


<sup>\*(</sup>Also available in 100-120V, 230V & 240V versions)




## OPTI-LUX™ 365 **SERIES FLASHLIGHT KITS**


Come complete with OPX-365 LED UV-A (365 nm) lamp with lanyard, two rechargeable batteries, smart charging cradle with AC and DC cord sets, UV-absorbing spectacles, belt holder and a hard carrying case.


### **HIGH-INTENSITY** UV-A Beam Profile

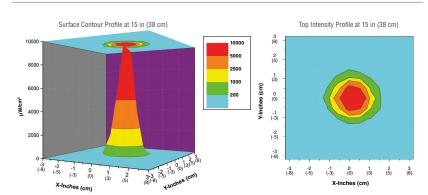

#### **STANDARD-INTENSITY** UV-A Beam Profile

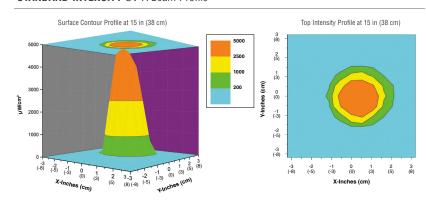







DISTRIBUTED BY:

₽K(€