

THE GLOBAL LEADER IN ULTRAVIOLET EQUIPMENT

VIVID™

UV-A LED Replacement Bulbs

BLE-LED-100, BLE-LED-150 + BLE-LED-150/F

Convert your mercury vapor HID lamp to modern LED technology.



LONGEVITY

Rated life is 10x longer than a mercury vapor HID bulb (with typical use)









LOWER LABOR COSTS Eliminates down-time



SAFER Over 50% cooler! 225°F vs. 109°F (HID) (LED)



ENVIRONMENTAL
Less environmental waste with fewer bulbs and energy efficient

The average lifespan of a mercuryvapor bulb when used in NDT inspection is 5,000 hours.

Upgrade to the VIVID™ and reap the benefits of LEDs that last 50,000 hours (based on average use).

Can be used in custom lamp fixtures that include enclosures.










NOMINAL STEADY-STATE UV-A COVERAGE AREA VISIBLE LIGHT MODEL UV-A INTENSITY MEASUREMENT at 15 in (38 cm) BLE-LED-100 4,700 µW/cm2 6.5 in (16.5 cm) < 1.0 foot-candle BLE-LED-150 Diameter (11 lux) (with UV-A pass filter) BLE-LED-150/F

Meets standard wavelength and output specifications

C€K

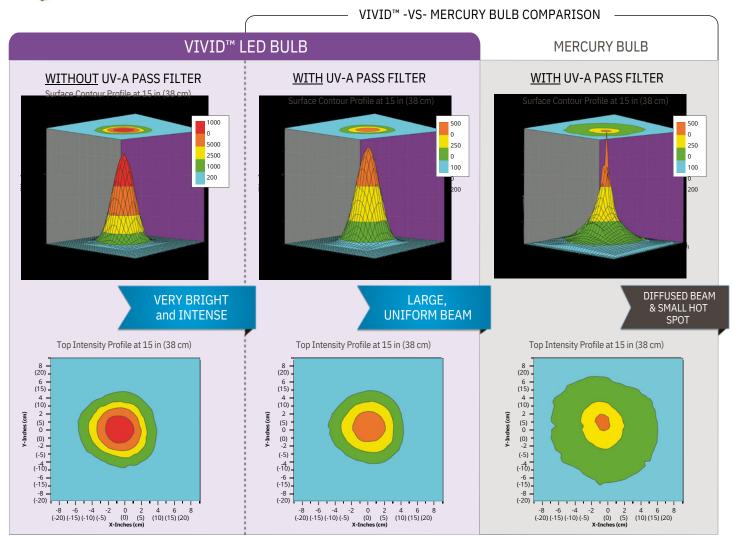

Works seamlessly in conjunction with the following Spectroline® HID lamps, saving you both time and money on bulb changes:

LAMP	CURRENT BULB TYPE	REPLACEMENT VIVID BULB
SB-100P Series	100S/M HID Bulb	BLE-LED-100
FC-100 Series	100S/M HID Bulb	BLE LED 100
BIB-150P Series	BLE-150CS-	
	115/M BLE-	BLE-LED-150
	150BS-115/M	
BIB-150P/F Series	BLE-150CS-	BLE-LED-150/F
FC-150/F Series	100/M BLE-	BLE-LED-130/F
	1 FACC 220/M	

150CS-230/M

BLE-150FC-

DISTRIBUTED BY:

230/M